


Specifications

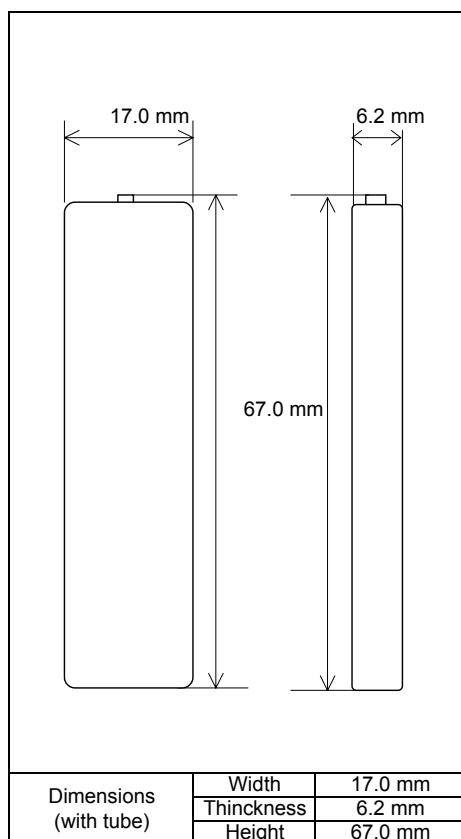

Type : Nickel-Metal Hydride Battery			Size : A1
Capacity ¹⁾	Typical		1350mAh
	Minimum		1250mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge ²⁾	1350 mA x about 1.1h
Ambient Temp.	Charge Condition	Fast Charge ²⁾	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 30days	-20°C - 50°C
		Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 30°C
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)			About 20mΩ(at 1000Hz)
Weight ⁴⁾			About 26 g
Size ⁴⁾ : (Width) x (Thickness) x (Height)			17.0(W) x 6.2(T) x 67.0(H) mm

1)Single cell capacity under the following condition.

Charge : 135mA×16h, Discharge : 270mA(E.V.=1.0V) at 20°C


2)Use recommended charging system.

3)After a few charge and discharge cycles under the above 1) condition.

4)With tube.

Typical Characteristics

Charge

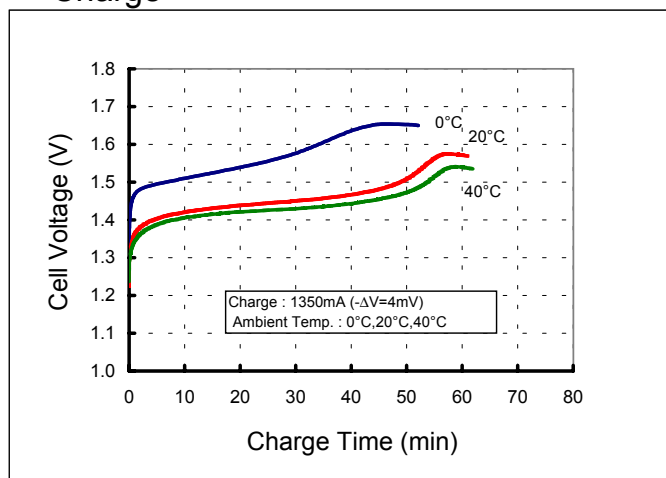

Discharge

