

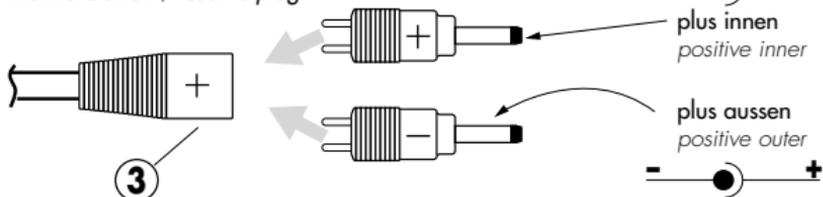


Polaritätswechsler / polarity changeover
Hohlstecker / coaxialplug

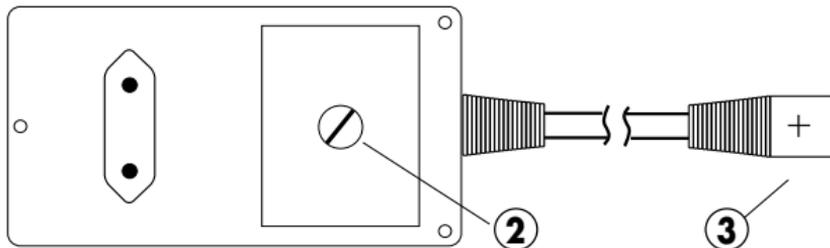

Polaritätswechsler / polarity changeover
Klinkenstecker / inelplug

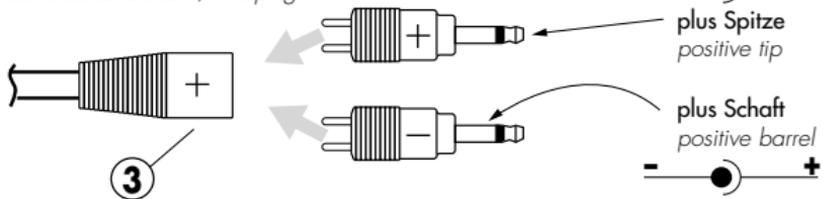

1 Technische Daten

Technical data / Dates techniques / Datos técnicos

	Eingangsspannung Input voltage Tension d'entrée Tension de entrada	Ausgangsspannung Output voltage Tension de sortie Tension de salida	Ausgangslast Output load Courant de sortie Corriente de salida
AP 312 Nr. 511102x	230 V AC/50 Hz	3,0/4,5/6,0/7,5/ 9,0/12,0 V DC	max. 300 mA
APS 1012 Nr. 511101x	230 V AC/50 Hz	1,5/3,0/4,5/6,0/ 7,5/9,0/12,0 V DC stabilisiert/stabilized Stabilisée/estabilizada	max. 1000 mA
APS 1212 traveller Nr. 511108x	100 - 240 V AC 50 - 60 Hz	3,0/4,5/6,0/7,5/ 9,0/12,0 V DC stabilisiert/stabilized Stabilisée/estabilizada	max. 1200 mA
APS 1612 traveller Nr. 5C1101x	100 - 240 V AC 50 - 60 Hz	3,0/4,5/6,0/7,5/ 9,0/12,0 V DC stabilisiert/stabilized Stabilisée/estabilizada	max. 1600 mA
ATPS 3615 Nr. 511110x	100 - 240 V AC 50 - 60 Hz	5,0/6,0/7,5/9,0/ 12,0/15,0 V DC stabilisiert/stabilized Stabilisée/estabilizada	max. 3600 mA
ATPS 2324 Nr. 511109x	100 - 240 V AC 50 - 60 Hz	12,0/15,0/18,0/20,0/ 22,0/24,0 V DC stabilisiert/stabilized Stabilisée/estabilizada	max. 2300 mA