


Cell Type BK-4HCDE

To PECE

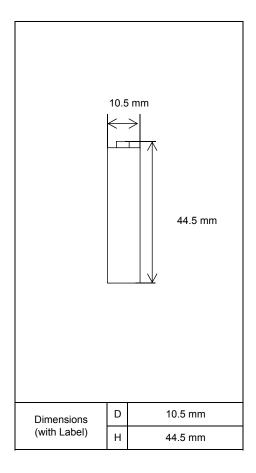

Specifications

| Type : Nickel-Metal Hydride Battery | | | Size : AAA Consumer Type |
|--|----------------------|---------------------|--------------------------|
| Countty of origin | | | Japan |
| Capacity 1) | Minimum | | 930mAh |
| Nominal Voltage | | | 1.2V |
| Charging Current x Time | | Fast Charge 2) | Max.480mA |
| Ambient Temp. | Charge Condition | Fast Charge 2) | 0°C - 40°C |
| | Discharge Condition | | 0°C - 50°C |
| | Storage Condition | Less than 90days | -20°C - 40°C |
| | | Less than 1year | -20°C - 30°C |
| Internal Impedance 3) (after discharge to E.V.=1.0V) | | | Approx. 45mΩ(at 1000Hz) |
| Weight 4) | | | Approx. 13 g |
| Size 4) :(Diameter) x (Height) | | | 10.5(D) x 44.5(H) mm |

¹⁾Single cell capacity under the following condition.

Charge: 93mA×16h, Discharge: 186mA(E.V.=1.0V) at 20°C

2)Use recommended charging system.

3)After a few charge and discharge cycles under the above 1) condition.

⁴⁾With Label.