


Data sheet

Yuvolt - Valve Regulated Lead Acid Battery

Y38-12

| Specifications | | |
|---|----------------|------------|
| Nominal voltage | 12 | V |
| 20-hr rate capacity to 1.75VPC at 20°C | 38 | Ah |
| 10-hr rate capacity to 1.8VPC at 20°C | 33,6 | Ah |
| Dimensions | | |
| Length | 197 (±1) | mm |
| Width | 165 (±1) | mm |
| Height | 170 (±1) | mm |
| (Height over terminals) | 170 (±2) | mm |
| Mass (typical) | 13,20 | kg |
| Terminal type | | |
| Female threaded terminal | M5 | |
| Torque (Nm) | 2.0~3.0 | Nm |
| Operating temperature range | | |
| Storage | -20°C to +60°C | |
| Charge | -15°C to +50°C | |
| Discharge | -20°C to +60°C | |
| Storage | | |
| Capacity loss per month at 20°C (approx) | 3 | % |
| Case material | | |
| Standard option | ABS (UL94:HB) | |
| Flame retardant option (FR) | ABS (UL94:V0) | |
| Charge voltage | | |
| Float charge voltage at 20°C | 13.65 (±1%) | V |
| | 2.275 (±1%) | V/cell |
| Float charge voltage temperature correction factor (for variations from the standard 20°C) | -3 | mV/cell/°C |
| Cyclic (or boost) charge at 20°C | 14.5 (±3%) | V |
| | 2.42 (±3%) | V/cell |
| Cyclic charge voltage temperature correction factor (for variations from the standard 20°C) | -4 | mV/cell/°C |
| Charge current | | |
| Float charge current limit | No limit | A |
| Cyclic (or boost) charge current limit | 9,5 | A |
| Maximum discharge current | | |
| 1 minute | 48 | A |
| Short-circuit current & internal resistance (According to EN IEC 60896-21) | | |
| Internal resistance | N/A | mΩ |
| Short-circuit current | N/A | A |
| Impedance | | |
| Measured at 1 kHz | 10 | mΩ |
| Design life | | |
| EUROBAT Classification: Standard Commercial | 3 to 5 | years |
| Safety | | |
| Installation | | |
| Can be installed and operated in any orientation except permanently inverted | | |
| Handles | | |
| Batteries must not be suspended by their handles (where fitted) | | |
| Vent valves | | |
| Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal | | |
| Gas release | | |
| VRLA batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container | | |
| Recycling | | |
| Yuasa's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations | | |

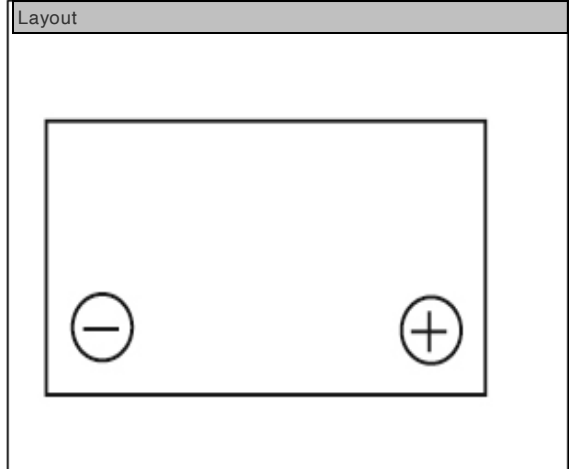

Third party certifications

ISO 9001 - Quality Management Systems
 ISO 14001 - Environmental Management System
 EN 45001 - OH&S Management Systems

Underwriters Laboratories Inc.



Standards

Compliance with IEC 60896 standards, EU Battery Directive

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE
 Issue No.: V1 / Issue date: Dec 2025



GS Yuasa Battery Europe Ltd.
 Unit 8
 Ignition Park
 Swindon
 SN3 5FB
 UK