


TECHNICAL DATA

Voltage	12.00 V
Performance	12Ah C20 to 1.75V/cell at 25°C
Float Voltage	2.27V/cell at 20°C
Connection torque	na
Max Charge Current	3.00 A
Weight (Typical)	4.0 KG

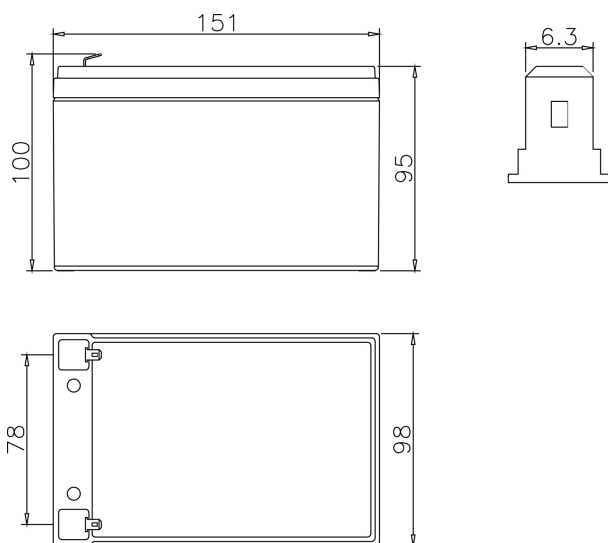

ELECTRICAL PERFORMANCES - Including Fiamm connection voltage drop

Constant Current Discharge Table [A] at 20°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	38,3	25,5	19,2	11,5	8,54	6,94	4,03	2,96		2,01			1,11
1,65	37,0	24,9	18,8	11,4	8,44	6,86	3,99	2,93		1,98			1,10
1,67	36,4	24,6	18,6	11,3	8,39	6,82	3,95	2,91		1,97			1,09
1,70	35,4	24,2	18,4	11,2	8,35	6,78	3,92	2,89		1,95			1,08
1,75	34,0	23,5	17,9	11,0	8,25	6,69	3,85	2,83		1,92			1,06
1,80	32,3	22,8	17,6	10,8	8,10	6,60	3,78	2,79		1,88			1,04
1,85													
1,90													

Constant Power Discharge Table [W/cell] at 25°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	66,8	45,8	35,2	22,0	16,6	13,7	8,05	5,95		3,99			2,22
1,65	65,1	45,1	34,7	21,8	16,5	13,5	7,98	5,90		3,95			2,20
1,67	64,0	44,5	34,4	21,7	16,4	13,5	7,92	5,88		3,93			2,19
1,70	62,4	43,9	34,1	21,6	16,3	13,4	7,86	5,85		3,91			2,18
1,75	60,0	42,8	33,4	21,3	16,2	13,3	7,76	5,77		3,86			2,15
1,80	57,4	41,7	32,9	21,1	16,0	13,2	7,67	5,71		3,80			2,12
1,85													
1,90													