

Keyword:
Extended Temperature Range

Type: SL-560

Performance Data **Size AA**
 (Typical values for batteries stored at 25 °C for one year)


| | |
|-----------------------------------|----------------------|
| System | Li/SOCl ₂ |
| Nominal voltage | 3.6 V |
| Nominal capacity | 1.7 Ah |
| Nominal current | 2 mA |
| Max. continuous discharge current | 20 mA |
| Anode surface area | 14 cm ² |
| Lithium content | 0.65 g |
| Weight | 18 g |
| Volume | 8.0 cm ³ |
| Temperature range | -55...+130 °C |

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 150 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety



Typical Discharge Curves at +85°C

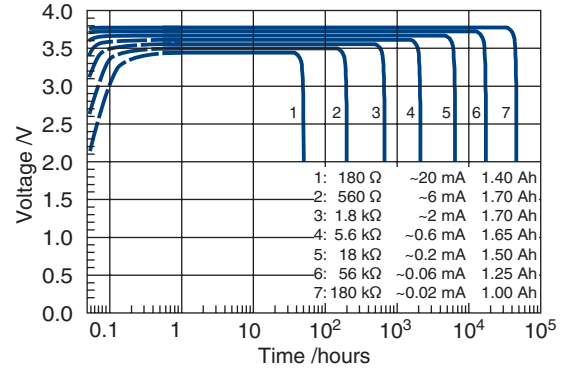

Available Capacity

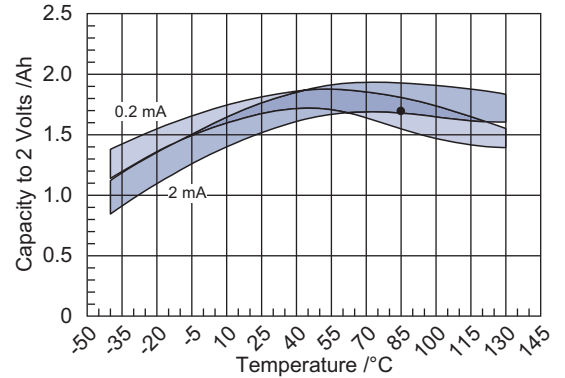

Operating Voltage

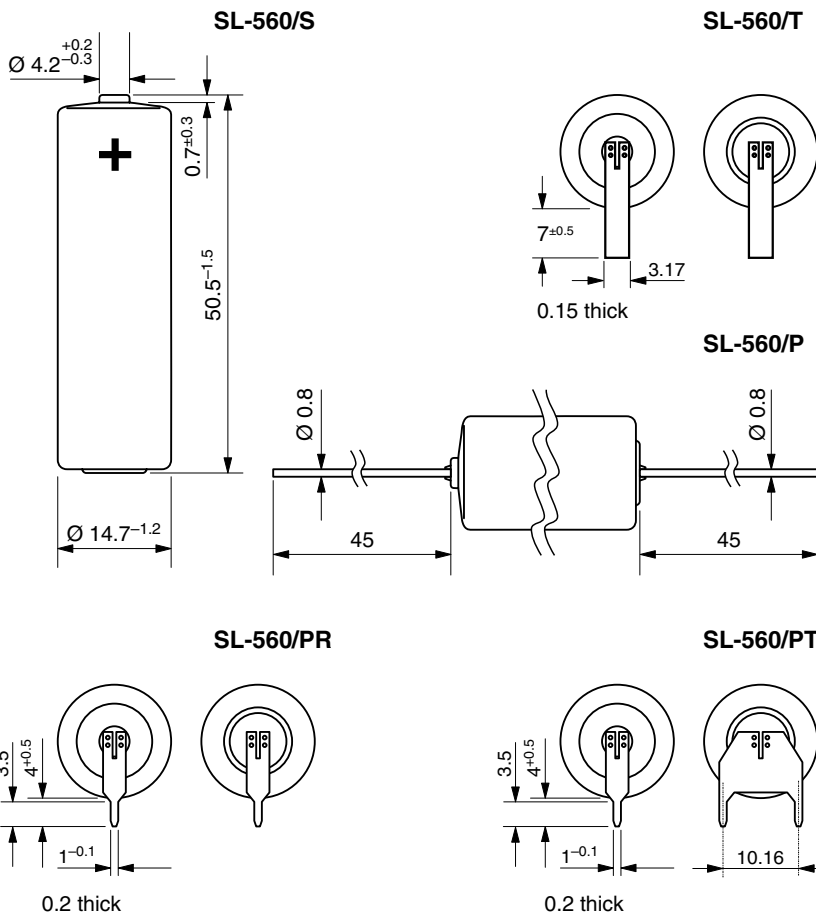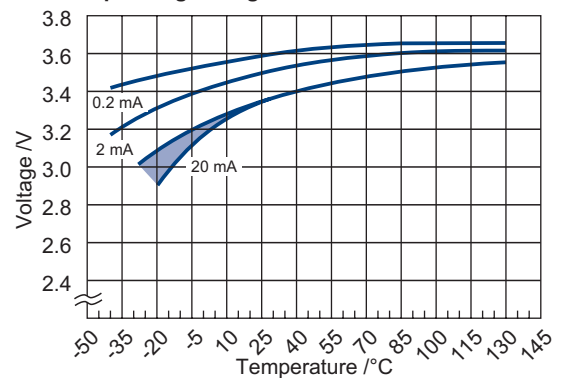

Available Terminations

| | |
|-----------|----------------|
| SL-560/S | Standard |
| SL-560/T | Tags |
| SL-560/P | Pins |
| SL-560/PR | Pins Radial |
| SL-560/PT | Polarized Tags |

Catalogue No.

| |
|---------------|
| 11 1 05601 00 |
| 11 1 05602 00 |
| 11 1 05603 00 |
| 11 1 05606 00 |
| 11 1 05608 00 |

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.