

8810


Max. 20 VA

AC/AC ADAPTERS




- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Kan på forespørsel modifiseres til å tilfredstille medisinsk standard (EN 60601)
- Utskiftbare plugger

- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Can upon request be modified to comply with the standard for electromedical equipment (EN 60601)
- Exchangeable output plugs



Tekniske data	Technical specifications	
Inngangsspenning:	Input voltage:	230 VAC +6/-10%, 50/60Hz
Utgangsspenning:	Output voltage:	6-42 VAC
Maks. utgangseffekt:	Max. output power:	20,0 VA
Isolasjonsklasse:	Insulation class:	II
Elektrisk sikkerhetsstandard:	Electrical safety standard:	EN 60065, EN 60742, EN 60950
EMC standarder	EMC standards	
• Emisjon:	• Emission:	EN 61000-6-3
• Immunitet:	• Immunity:	EN 61000-6-1
Utgangsterminaler	Output terminals	
• Sek. ledning med/uten plugg:	• Cord with/without plug:	Tilbehør / Accessories
Mål uten plugg (LxBxH):	Dimensions without plug (LxWxH):	100 x 51 x 63 mm
Vekt:	Weight:	450 g

VAC

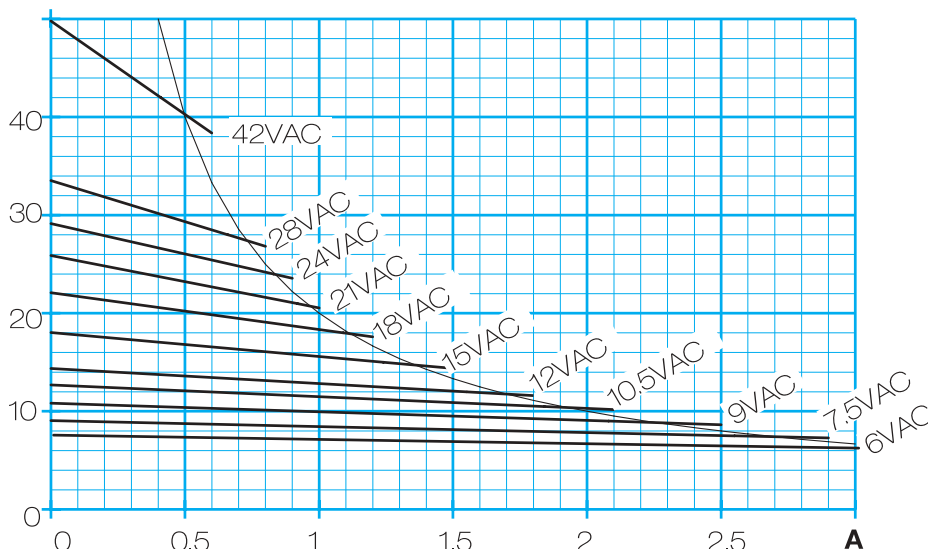

Spenningsversjon (VAC) Voltage version (VAC)	Merkelast (mA) Nominal load (mA)
6	3200
7,5	2600
9	2100
10,5	1900
12	1600
15	1300
18	1100
21	950
24	850
28	700
42	430

- Maks. last (A): Se kurve
- Max. load (A): See diagram

19062006

www.mascot.no
sales@mascot.no
Phone: +47 69 36 43 00
Fax: +47 69 36 43 01

Mascot UK
Box 2090, Salisbury
Wiltshire SP2 2BH
UK
+44 1722 504 853
+44 845 299 1210

Mascot DE-AT-CH-BENELUX
Hirschbergstr. 28/7
D-74838 LIMBACH
WANGEN
GERMANY
+49 6287 95140
+49 6287 95141

Tettlinger Str. 52
D-88239
GERMANY
+49 7528 951677
+49 7528 951678

Mascot France
38 rue Leo Lagrange
94270 Le Kremlin Bicêtre
FRANCE
+33 1 46 58 71 85
+33 1 46 58 71 85